

# VersaKey™

POS Keyboard with Built-in MagStripe Reader

## Versatile, full function Keyboard

ID TECH's VersaKey features the enhanced 105/106 key layout maximizing the user's productivity. The included MagStripe reader with many country specific layouts provides added flexibility.

## Versatile MagStripe Reader

VersaKey's integrated MagStripe reader is developed with configurability in mind. Reader output can be transformed to fit your specific application with the included configuration software, such as the format of the output or the selection of specific tracks on the ISO 7811 compliant cards.

## Intelligent Interface Options

VersaKey either comes in USB or PS/2 interface depending on the user's needs. For added convenience, the USB version also comes with a USB Hub. Whether it's the PS/2 or the USB version, the communication is shared between the keyboard and the MagStripe reader meaning a reduction of cabling for the user.

## Durable Keyboard and Card Reader Combination

VersaKey is designed to provide the reliability needed to meet the demand of high use environment. The unit is proven to endure more than 10 million key operations and 1 million swipes. Standard warranty of 3 years provides confidence that the unit is built to last.

## Features and Benefits

- 105/106 key layout in full-size 18" form factor
- Full-function POS ready keyboard with card reader
- Microsoft Keyboard layout with LED indicators
- Plug-n-Play with Windows operation systems
- Interface: USB/KB & PS/2 KB
- 20 million key strokes & 1 million card swipes guaranteed
- 2 or 3 tracks magnetic stripe reader, full data editing capability
- Multiple language keyboard layout available with minimum order quantity
- 3 Year warranty from date of invoice
- Extra two-port USB hub for USB version



**IDTECH®**  
Value through Innovation

# VersaKey<sup>TM</sup> Specifications IDKA-23XXXXB

## Electrical

Power Requirements: +5.0 VDC  $\pm$ 10%, 60mA Max

## Environmental

Operating Temperature: 32°F to 104°F ( 0°C to 40°C )

Storage Temperature: - 4°F to 104°F (-20°C to 40°C)

Drop Test: 24inches(610 mm ) Drop: 1 corner, 2-sidelines, 3-sides

Vibration Test: 60 Hz/sec 3 mm amplitude X,Y,Z each axis at 2 hours

## Reliability

Operating Life: 20,000,000 keystrokes

MTBF: More than 60,000 power on hours

ESD Immunity: 8KV to 15 kV min, after reset

Approvals: FCC class B and CE

Warranty: Three Years, parts and labor



## Mechanical

Dimensions (L) x(W) x (H): 18.5 inches (469.9mm) x 8.03 inches (203.9mm) x 1.69 inches (42.8mm)

Cable Length: 5-foot.(1.5m )

Cable Connector: PS/2 or USB

Operating Force: 50  $\pm$  7g


Keyswitch Total Travel: 4.0  $\pm$  0.5 mm

Keyboard Material: ABS, Meets flammability spec. UL94HB

Jacket Material: PVC jacket with Aluminum Shielding

Color: Black

Footprint:

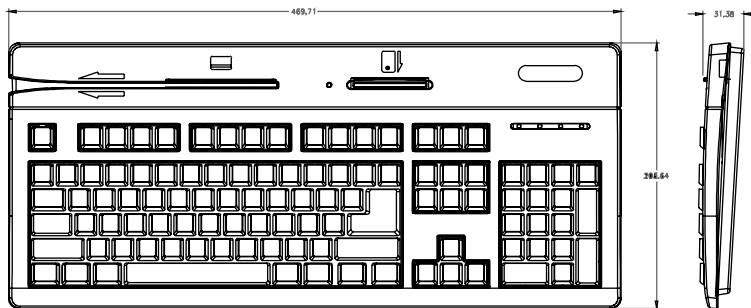

# IDTECH<sup>®</sup>

Value through Innovation

### Corporate Headquarters:

10721 Walker Street Cypress, California 90630

[www.idtechproducts.com](http://www.idtechproducts.com)

(714) 761-6368 [sales@idtechproducts.com](mailto:sales@idtechproducts.com)

### International Sales Office

#### for Canada & South America:

+450 465 5261 (Canada) [robertop@idtechproducts.com](mailto:robertop@idtechproducts.com)

### European Sales Offices:

+33 5 65 50 28 59 (France)

+49(0) 8851 6159900 (Germany)

[emea@idtechproducts.com](mailto:emea@idtechproducts.com)

**ISO 9001 : 2000 Certified**